

P-2 Type Fire Alarm Control Panel : RPP-EBW01

Features

1. Time Delay Function

The Time Delay function is equipped to reduce the false alarms.

Setting of Time Delay Function is by a simple built in switch located on the PCB inside the control panel.

In the event of a Fire, if the Manual Call Point is activated manually, this Time Delay Function is automatically cancelled for immediate Alarm.

2. Self Diagnosis Function

Two kind of Self Diagnosis Function have been equipped in this control panel.

-Automatic Open Circuit Detection Function for Detector Line

-Battery Disconnection Detection Function

3. Lightning surge protection

Improved lightning surge protection is adopted.

4. Noise immunity

Noise immunity has been improved for impulse & high frequency noise.


5. Light weight & Simple design

230mm(W) X 190mm(H) X 65mm(D), Approximately 1.4Kg

Light weight and Simple design by means of SMD components, small PCB, compact Power Unit etc..

6. Up to 30 pcs. of Smoke Detectors can be connected

And also, the control panel has a terminal for Fire Signal Transfer thus the interlocking with other equipment is possible.

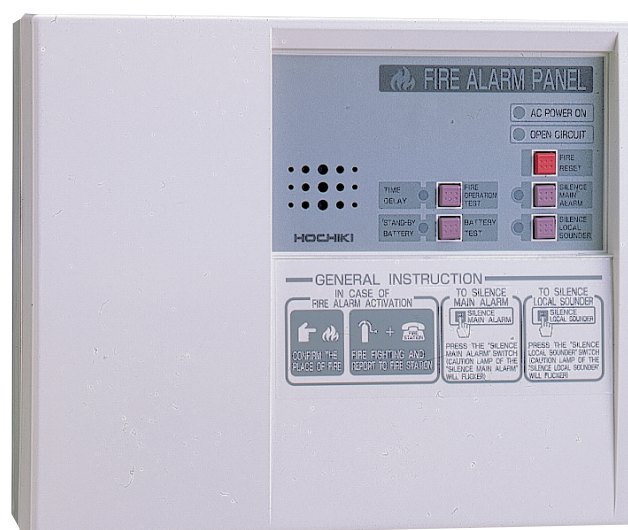

RPP-EBW01



Specifications

	RPP-EBW
Type	P Type 2nd Class Fire Alarm Control Panel (with Time Delay Function)
Model Name	RPP-EBW01 (JE)
Zone Number	1
Mains	AC220V 50/60Hz
Transformer Capacity	AC220V/DC 24V 25VA
Battery Charger	Battery : option
Main Sounder	Buzzer DC24V 25mA
Operating Temperature Range	0°C ~ 40°C
Material	Self Extinguishing Plastic
Color	Light Gray
Weight	Approx. 1.1Kg
Dimension	230mm(W) X 190mm(H) X 65mm(D)
Made	Japan

